




Use a flat tip (i.e. flat screw driver).
Insert into the small opening at the
Bottom of the tablet).





Pry the cover gently (don't use excessive
Force) so the battery cover is slightly lifted up



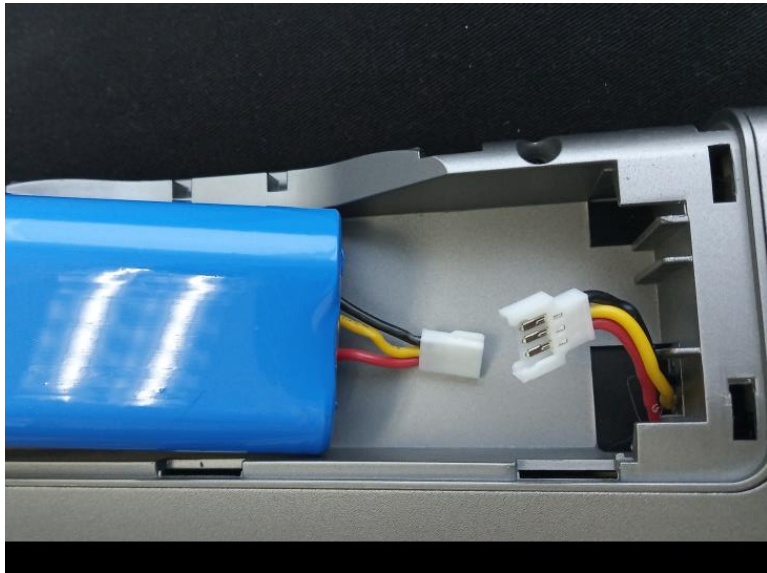

Replace the battery – pull and remove the Battery from connection.

Last step: press the cover back to position

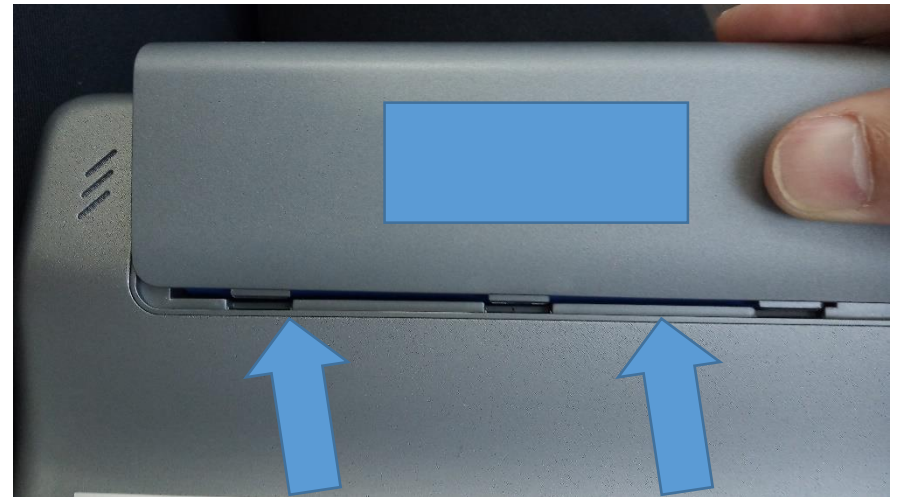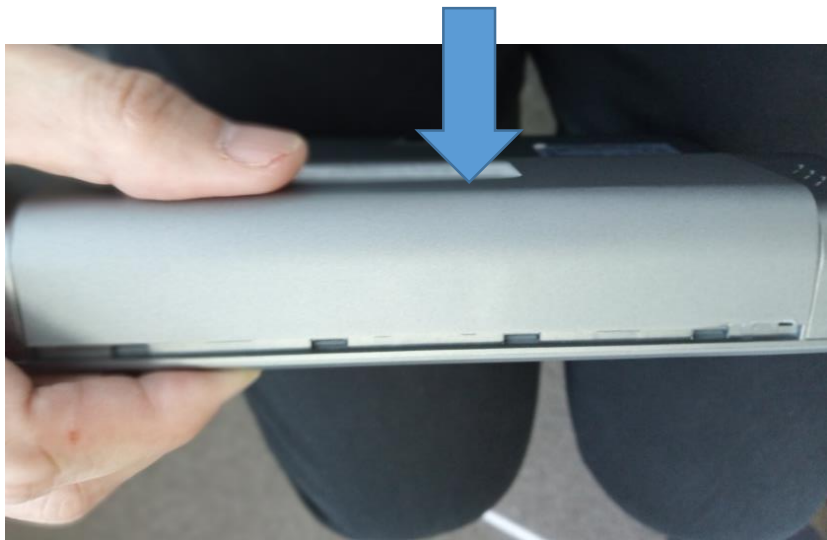

Putting back the cover – align this side first